




PRIMEA INDOOR LED DISPLAY

This dynamic, stunning, and cutting-edge indoor LED display is meant for those applications where image quality really matters. Ösel Primea is perfect for a wide range of applications like retail, cinemas, museums, weddings, events, airports, schools, restaurants, etc. You can even use them in storefront windows without the fear of washout. These dynamic, high-resolution LED displays come in a variety of sizes and are fully customizable.

FEATURES

- Superb Image Quality
- Lightweight Cabinet
- Swift Installation
- Easy Maintenance

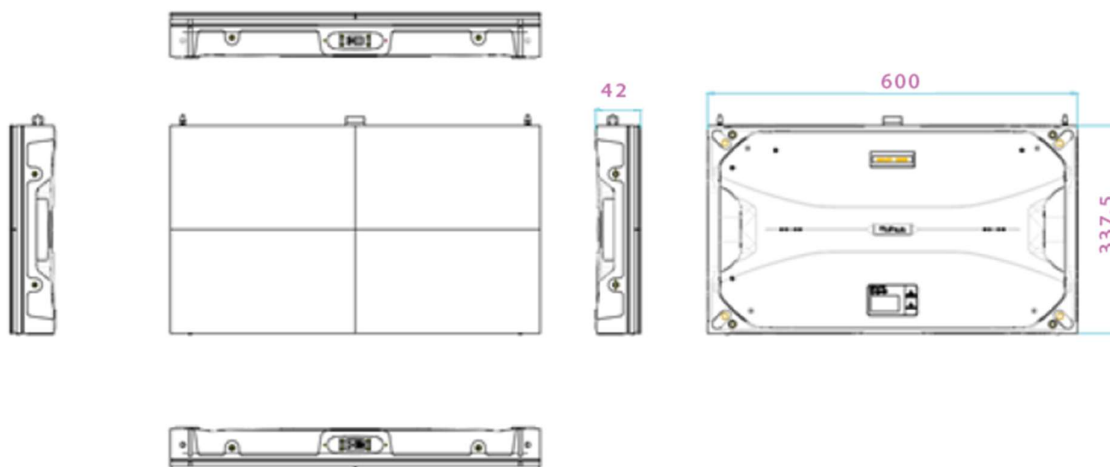

TECHNICAL PARAMETERS FOR PRIMEA

Parameters	Values
Make	OSEL
Model	Primea
Pitch(mm)	1.875
Cabinet Resolution(WxH)	320 x 180
Cabinet Size(mm)(WxH)	600 x 337.5
Pixel Density(pixel/m ²)	284444
Brightness(nits)	≥800
Color Temperature(K)	3000-15000 Adjustable
Horizontal Viewing Angle(°)	160
Vertical Viewing Angle(°)	140
Color Depth	16 bit
Brightness Uniformity	≥97%
Contrast Ratio	5000:1
Max Power Consumption (W/m ²)	≤600
Average Power Consumption (W/m ²)	≤200
Power Supply	AC100~240V (50/60Hz)
Frame Rate(Hz)	50&60
Refresh Rate(Hz)	3840
Ingress Protection	IP20
Lifetime(hrs.)	1,00,000
Operation Temperature(°C)	-10~+40
Storage Temperature(°C)	-20~+60
Operation Humidity(RH)	10~80% no condensation
Storage Humidity(RH)	10~85% no condensation

Design and specifications are subject to change without notice.