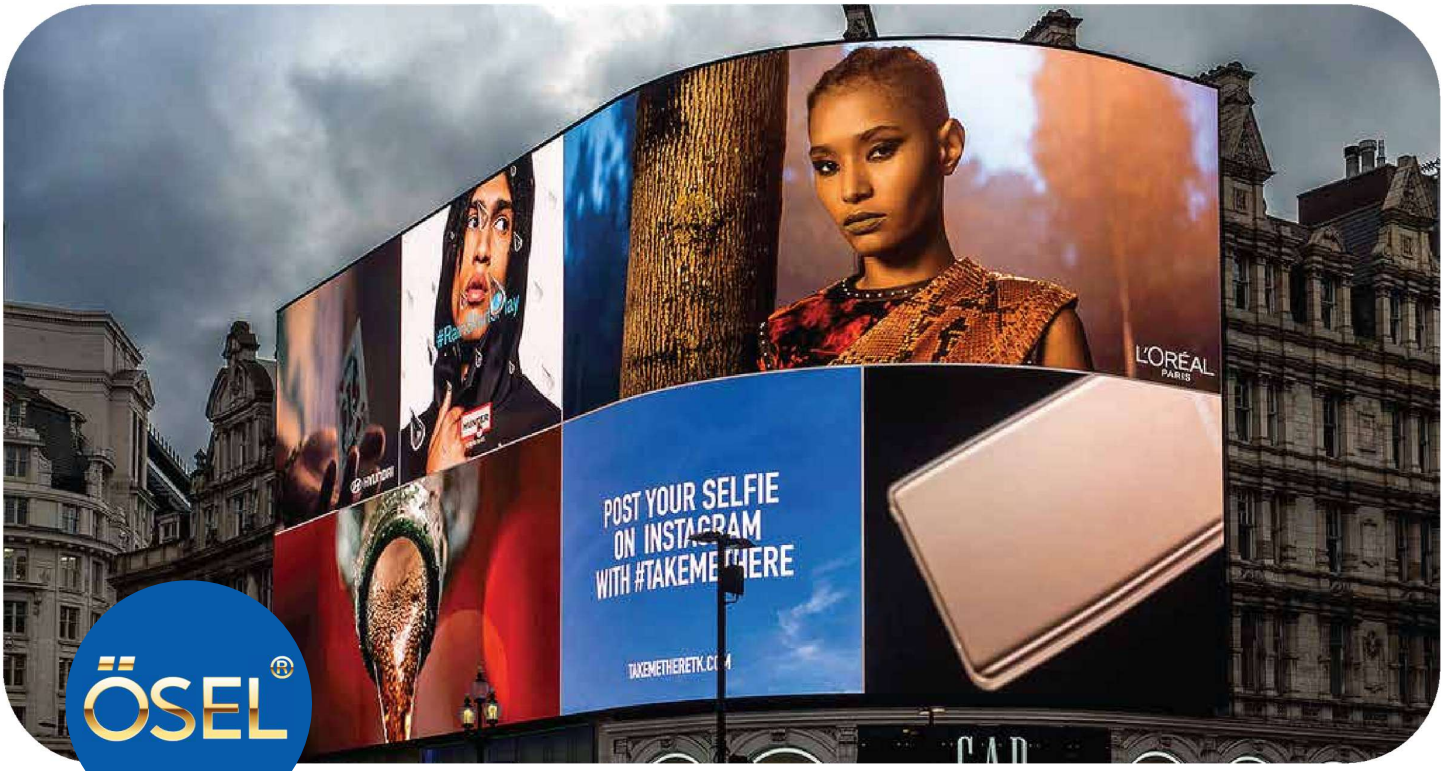

SUPREME-X OUTDOOR LED DISPLAY

Supreme-X uses the highest-quality components to deliver the brightest image quality and flicker-free video to catch the eye of the viewer. Suitable for 24/7 operations in the harshest of environments, these rugged displays offer high-end performance at attractive prices. Stadiums, billboard advertisements, banks, railway stations, bus terminals, shopping malls, post offices, schools, restaurants, VMS, entertainment venues, and enterprises are only some of the application areas where Supreme-X has proven to be highly successful in engaging, informing and entertaining customers.

FEATURES

- **Rugged and Durable**
- **Creative Installations**
- **High Energy Efficiency**

OSEL DEVICES LIMITED | Signature Tower First floor, plot no 3, Sector knowledge park- III, Greater Noida City-201308, Uttar Pradesh, India **Tel:** 1800-890-4398 **Website:** www.oseltech.com

TECHNICAL PARAMETERS FOR SUPREME-X

Items	P4.44
Pixel Configuration	SMD
Pitch (mm)	4.44
Cabinet Resolution (W*H)	216x216
Cabinet Size (mm) (W*H)	960×960
Cabinet Material	Die-Cast Aluminium
Unit Area (m^2)	0.9216
Pixel Density (pixel/m^2)	50625
Brightness (nits)	≥5000
Horizontal Viewing Angle (°)	160
Vertical Viewing Angle (°)	140
Color Processing	16 bit
Contrast Ratio	5000:1
Max Power Consumption (W/m^2)	700
Power Supply	AC100~240V (50/60Hz)
Frame Rate (Hz)	50 & 60
Refresh Rate (Hz)	3840
Lifetime (Hrs)	1,00,000
Maintenance Access	Front and Rear
Ingress Protection	IP66
Operation Temperature (°C)	-10~50
Storage Temperature (°C)	-20~60
Operation Humidity	10%RH~98%RH
Storage Humidity	10%RH~98%RH

Design and specifications are subject to change without notice.